

Wiener index of binomial trees and Fibonacci trees

K. Viswanathan Iyer *

Department of Computer Science and Engineering
National Institute of Technology
Tiruchirapalli-620 015, India
email: kvi@nitt.edu

Udaya Kumar Reddy K.R

Department of Computer Science and Engineering
National Institute of Technology
Tiruchirapalli-620 015, India
email: krudaykumar@yahoo.com

Abstract

Given a simple connected undirected graph $G = (V, E)$, the *Wiener index* $W(G)$ of G is defined as half the sum of the distances $d(u, v)$ between all pairs of vertices u, v of G , where $d(u, v)$ denotes the distance (the number of edges on a shortest path between u and v) between u, v in G . We obtain an expression for $W(G)$, where G is a binomial tree. For Fibonacci trees and binary Fibonacci trees with F_k (k -th Fibonacci number) vertices, we outline algorithms for computing their Wiener index in time $O(\log F_k)$. This may be compared with the existing result: for any tree T with n vertices, $W(T)$ can be computed by an algorithm in time $O(n)$.

Keywords: binomial tree, binary Fibonacci trees, distance in graphs, Fibonacci trees, Wiener index.

1 Introduction

Let $G = (V(G), E(G))$ be a connected undirected graph without self-loops and multiple edges. The *Wiener index* $W(G)$ of G is defined as

$$W(G) = \frac{1}{2} \sum_{u \in V(G)} \sum_{v \in V(G)} d(u, v), \quad (1)$$

where $d(u, v)$ denotes the shortest distance between u, v in G .

Wiener index is a distance based graph invariant which is one of the most popular topological indices in mathematical chemistry. It is named after the chemist Harold Wiener, who first introduced it in 1947 to study chemical properties of alkanes. It is now recognized that there are good correlations between $W(G)$ and physico-chemical properties of the organic compound from which G is derived, especially when G is a tree. As mentioned in [8], in the process of drug design, one may want to construct chemical compounds from common molecules so that the resulting compound has an expected Wiener index. For chemical applications of Wiener index, see [6, 8]. For more details on Wiener index of trees and their applications, see [1].

We begin with the definitions of binomial trees and two types of Fibonacci trees. Let k be a nonnegative integer. The *binomial tree* T_{B_k} of order k , is an ordered tree defined recursively in the following way:

*Corresponding author

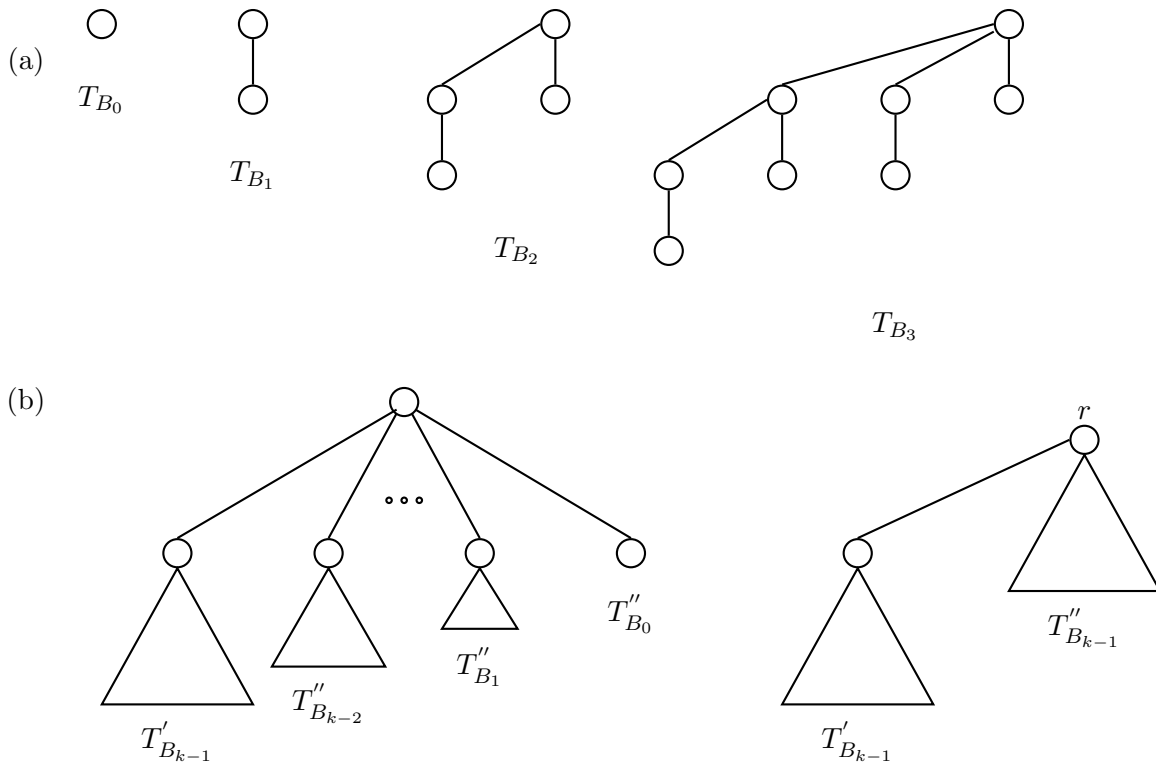


Figure 1: Binomial trees. (a) The binomial trees T_{B_0} through T_{B_3} . (b) Two ways of looking at the binomial tree T_{B_k} (Note: $T_{B_{k-1}} \simeq T'_{B_{k-1}} \simeq T''_{B_{k-1}}$).

- i. The binomial tree T_{B_0} consists of a single node.
- ii. For $k \geq 1$, the binomial tree T_{B_k} is constructed from two binomial trees $T_{B_{k-1}}$ of order $k-1$ by attaching one of them as the leftmost child of the root of the other.

For more details on binomial trees and its properties, see [3]. Fig. 1(a) shows the binomial trees T_{B_0} through T_{B_3} and Fig. 1(b) shows the binomial tree T_{B_k} . Let F_k denote the k -th Fibonacci number. The *Fibonacci tree* T_{f_k} of order k , is defined recursively in the following way:

- i. $T_{f_{-1}}$ and T_{f_0} are both Fibonacci trees consisting of a single node.
- ii. For $k \geq 1$, T_{f_k} consists of two Fibonacci trees $T_{f_{k-1}}$ and $T_{f_{k-2}}$ of orders $k-1$, and $k-2$, respectively, where $T_{f_{k-2}}$ is the rightmost child of the root of the other.

Denote $|T|$ = number of vertices in the tree T . We have $|T_{f_k}| = |T_{f_{k-1}}| + |T_{f_{k-2}}|$, where $|T_{f_k}| = F_{k+2}$. For more details on Fibonacci trees, see [2]. Fig. 2(a) shows the Fibonacci trees $T_{f_{-1}}$ through T_{f_4} and Fig. 2(b) shows the Fibonacci tree T_{f_k} . Let $T_{f_k}^b$ denote the binary Fibonacci tree of order k . $T_{f_k}^b$, is a rooted tree defined recursively in the following way:

- i. $T_{f_0}^b$ and $T_{f_1}^b$ are both the rooted tree consisting of no nodes and a single node respectively.
- ii. For $k \geq 2$, the rooted tree $T_{f_k}^b$ is constructed from a root with two Fibonacci trees $T_{f_{k-1}}^b$ (of order $k-1$) as its left subtree and $T_{f_{k-2}}^b$ (of order $k-2$) as its right subtree.

It follows $|T_{f_k}^b| = |T_{f_{k-1}}^b| + |T_{f_{k-2}}^b| + 1$, where $|T_{f_k}^b| = F_{k+2} - 1$. For any vertex $v \in T_{f_k}^b$, $\deg(v) \leq 4$ —hence the binary Fibonacci trees are chemical trees. For more details on binary Fibonacci trees, see [7]. Fig. 3(a) shows the binary Fibonacci trees $T_{f_0}^b$ through $T_{f_4}^b$ and Fig. 3(b) shows the binary Fibonacci tree $T_{f_k}^b$.

We need the following lemma and its corollary (see [1]).

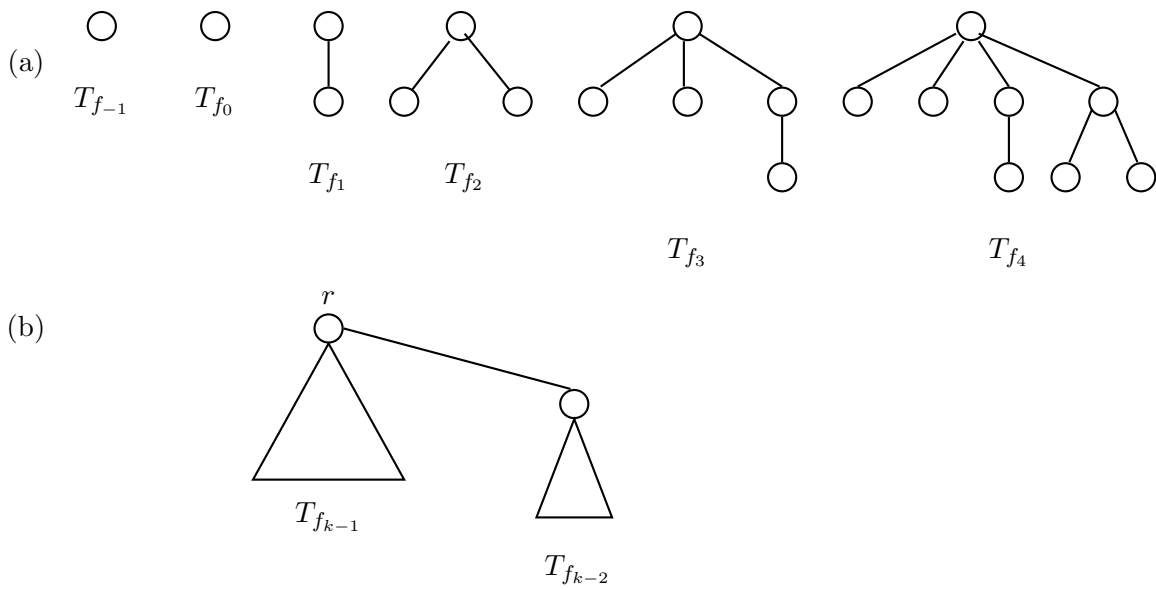


Figure 2: Fibonacci trees. (a) Fibonacci trees $T_{f_{-1}}$ through T_{f_4} . (b) Fibonacci tree T_{f_k} .

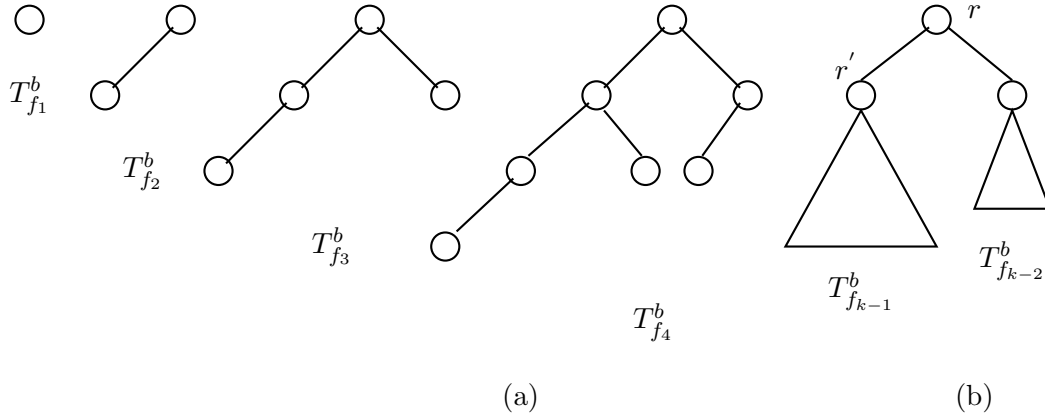


Figure 3: Fibonacci trees represented in the form of a binary tree. (a) The binary Fibonacci trees $T_{f_0}^b$ through $T_{f_4}^b$. (b) The binary Fibonacci tree $T_{f_k}^b$.

Lemma 1:

Let T_1 and T_2 be two trees with $|V(T_1)| = n_1$ and $|V(T_2)| = n_2$ respectively, such that $V(T_1) \cap V(T_2) = \phi$. Let T be a tree obtained by identification of a vertex of T_1 and a vertex of T_2 . Let this common vertex be u . Then

$$W(T) = W(T_1) + W(T_2) + (n_1 - 1)D_{T_2}(u) + (n_2 - 1)D_{T_1}(u), \quad (2)$$

where, for any vertex v in T , $D_T(v)$ denotes the sum of the distances of the form $d(v, x)$, for all x in $V(T)$.

Proof. Follows from a simple combinatorial argument. ■

The following corollary is a consequence of Lemma 1.

Corollary 1:

Let T_1 and T_2 be two trees with $|V(T_1)| = n_1$ and $|V(T_2)| = n_2$ respectively, such that $V(T_1) \cap V(T_2) = \phi$. Let $u \in V(T_1)$ and $v \in V(T_2)$. Let T be a tree obtained from T_1 and T_2 by introducing the edge uv . Then

$$W(T) = W(T_1) + W(T_2) + n_1 D_{T_2}(v) + n_2 D_{T_1}(u) + n_1 n_2. \quad (3)$$

Using Lemma 1, we obtain an expression for $W(T)$, where T is a binomial tree. It is known [1, 4] that for a tree T with $|V(T)| = n$, $W(T)$ can be computed by an algorithm in time $O(n)$; thus for Fibonacci tree T_{f_k} and binary Fibonacci tree $T_{f_k}^b$ with $|V(T_{f_k})| = F_{k+2}$ and $|V(T_{f_k}^b)| = F_{k+2}-1$ respectively, such an algorithm can compute $W(T_{f_k})$ or $W(T_{f_k}^b)$ in time $O(F_{k+2})$ and requires as an input a description of T_{f_k} or $T_{f_k}^b$, e.g., as adjacency list. Using Corollary 1, we outline computational procedures for computing $W(T_{f_k})$ and $W(T_{f_k}^b)$ in time $O(\log F_k)$, assuming that the input is only the order k of the tree.

2 Wiener index of binomial trees

Theorem 1:

Let T_{B_k} be a binomial tree with 2^k nodes. Then the Wiener index $W(T_{B_k})$ is given by

$$W(T_{B_k}) = (k-1)2^{2k-1} + 2^{k-1}.$$

Proof. Consider the binomial tree of Fig. 1(b). For a vertex $r \in T_{B_{k-1}}''$, let $D_{T_{B_k}}'(r)$ be the sum of the distances of the form $d(r, x)$, for all $x \in T_{B_{k-1}}'$. For convenience we denote $D_{T_{B_k}}'(r) = D_{T_B}'(k)$. We first derive a closed form expression for $D_{T_B}'(k)$ and $D_{T_B}''(k)$ and then derive an expression for $W(T_{B_k})$. From Fig. 1(b), we have

$$D_{T_B}'(k) = 2^{k-1} + D_{T_B}'(k-1) + D_{T_B}'(k-2) + \dots + D_{T_B}'(1). \quad (4)$$

Also

$$D_{T_B}'(k-1) = 2^{k-2} + D_{T_B}'(k-2) + D_{T_B}'(k-3) + \dots + D_{T_B}'(1). \quad (5)$$

From (4) and (5)

$$D_{T_B}'(k) = 2^{k-2} + 2D_{T_B}'(k-1). \quad (6)$$

Solution to (6) yields

$$D_{T_B}'(k) = (k+1)2^{k-2}. \quad (7)$$

Similar to (4) we have

$$D_{T_B}''(k) = D_{T_B}'(k) - 2^{k-1}. \quad (8)$$

Using (7) in (8) we get

$$D_{T_B}''(k) = (k+1)2^{k-2} - 2^{k-1} = (k-1)2^{k-2}. \quad (9)$$

Applying Lemma 1 to Fig. 1(b) we get

$$W(T_{B_k}) = W(T_{B_{k-1}}') + W(T_{B_{k-1}}'') + 2^{k-1}[D_{T_B}'(k)] + 2^{k-1}[D_{T_B}''(k)]. \quad (10)$$

Using (7) and (9) in (10) we get

$$W(T_{B_k}) = W(T_{B_{k-1}}') + W(T_{B_{k-1}}'') + 2^{k-1}[(k+1)2^{k-2} + (k-1)2^{k-2}] \quad (11)$$

$$= W(T_{B_{k-1}}') + W(T_{B_{k-1}}'') + 2^{k-1}k2^{k-1}. \quad (12)$$

Since $T_{B_{k-1}}'$ and $T_{B_{k-1}}''$ are isomorphic to $T_{B_{k-1}}$, from (12) we get

$$W(T_{B_k}) = 2W(T_{B_{k-1}}) + k2^{2k-2}. \quad (13)$$

Solution to (13) gives the expression for $W(T_{B_k})$ as given in the Theorem 1. ■

3 Computing Wiener index of Fibonacci trees

3.1 Fibonacci trees

Consider the Fibonacci tree T_{f_k} of Fig. 2. For a vertex $r \in T_{f_k}$, let $D_{T_{f_k}}(r)$ be the sum of distances of the form $d(r, x)$, for all $x \in T_{f_k}$. For convenience we denote $D_{T_{f_k}}(r) = D_{T_f}(k)$. In computing $W(T_{f_k})$, we first derive a closed form expression for $D_{T_f}(k)$. From Fig. 2(b), we have

$$D_{T_f}(k) = D_{T_f}(k-1) + D_{T_f}(k-2) + F_k, \quad (14)$$

with initial conditions $D_{T_f}(0) = 0$, $D_{T_f}(1) = 1$, and $D_{T_f}(2) = 2$.

We introduce the generating function $G(z)$ as

$$G(z) = D_{T_f}(1)z + D_{T_f}(2)z^2 + D_{T_f}(3)z^3 + D_{T_f}(4)z^4 + \dots \quad (15)$$

From (14) and (15) it follows that

$$(1 - z - z^2) G(z) = F_1 z + F_2 z^2 + F_3 z^3 + F_4 z^4 + \dots = \frac{z}{1 - z - z^2}. \quad (16)$$

From (16) we get

$$G(z) = \frac{z}{(1 - z - z^2)^2} = \frac{1}{5z} \left[\frac{1}{(1 - \phi z)^2} + \frac{1}{(1 - \hat{\phi} z)^2} - \frac{z}{(1 - z - z^2)} \right]. \quad (17)$$

From (17) it follows (see for example [5]) that

$$[z^k]G(z) = D_{T_f}(k) = \sum_{j=1}^{k+1} F_j F_{k-j+1} = \frac{1}{5} \left[k F_{k+2} + (k+2) F_k \right]. \quad (18)$$

Now applying Corollary 1 to Fig. 2(b) we have the expression for $W(T_{f_k})$ as given in Lemma 2.

Lemma 2:

Let T_{f_k} be the Fibonacci tree of order k . Then the Wiener index $W(T_{f_k})$ is given by the following expression:

$$W(T_{f_k}) = W(T_{f_{k-1}}) + W(T_{f_{k-2}}) + F_{k+1} D_{T_f}(k-2) + F_k D_{T_f}(k-1) + F_{k+1} F_k. \quad (19)$$

We now compute $W(T_{f_k})$ as shown in Fig. 4.

We thus have the following result.

Theorem 2:

For a tree T_{f_k} ($k > 2$), we can algorithmically compute $W(T_{f_k})$ in time $O(\log F_k)$. The input to the algorithm requires only the order k of the tree T_{f_k} .

Proof. It suffices to note that in Fig. 4, step 1 requires $O(\log F_k)$ additions and steps 4-6 require $O(\log F_k)$ multiplications and additions. ■

3.2 Binary Fibonacci trees

In computing $W(T_{f_k}^b)$, we first derive a closed form expression for $D_{T_f^b}(k)$. Note that $D_{T_f^b}(0) = 0$, $D_{T_f^b}(1) = 0$, and $D_{T_f^b}(2) = 1$. From Fig. 3, we have,

$$D_{T_f^b}(k) = D_{T_f^b}(k-1) + D_{T_f^b}(k-2) + F_{k+2} - 2. \quad (20)$$

Function WI-FIB-TREE(k : an order of T_{f_k})

```
// Computes  $W(T_{f_k})$ .

1.   $\forall 1 \leq i \leq k+1$ , Compute  $F_i$ ;
2.   $W_1 := 1$ ;  $W_2 := 4$ ;
3.  for  $i := 3$  to  $k$  do begin
4.       $D_1 := 0.2 ((i-1) F_{i+1} + (i+1) F_{i-1})$ ; // by (18)
5.       $D_2 := 0.2 ((i-2) F_i + (i) F_{i-2})$ ; // by (18)
6.       $W := W_2 + W_1 + F_{i+1}D_2 + F_iD_1 + F_{i+1}F_i$ ; // by (19)
7.       $W_1 := W_2$ ;
8.       $W_2 := W$ ;
9.  end;
10. return  $W$ ;
```

Figure 4: Computing $W(T_{f_k})$.

In a manner similar to that in Section 3.1, we obtain

$$D_{T_f^b}(k) = \sum_{j=2}^{k+1} (F_{j+2} - 2)F_{k-j+1}. \quad (21)$$

Simplifying the right hand side of (21) we get

$$D_{T_f^b}(k) = \frac{1}{5}(k-3)F_{k+3} + \frac{2}{5}(k-2)F_{k+2} + 2. \quad (22)$$

In Fig. 3(b), we identify $T_{f_{k-1}}^b$ together with the edge $(r, r') \in T_{f_k}^b$ as $T_{f_{k-1}}^b$. Now applying Corollary 1 to Fig. 3(b) we have the expression for $W(T_{f_k}^b)$ as given in Lemma 3.

Lemma 3:

Let $T_{f_k}^b$ be the binary Fibonacci tree of order k . Then the Wiener index $W(T_{f_k}^b)$ is given by the following expression:

$$\begin{aligned} W(T_{f_k}^b) &= W(T_{f_{k-1}}^b) + W(T_{f_{k-2}}^b) + F_{k+1}D_{T_f^b}(k-2) \\ &\quad + (F_k - 1)D_{T_f^b}(k-1) + F_{k+1}(F_k - 1). \end{aligned} \quad (23)$$

Using (23) we can compute $W(T_{f_k}^b)$ similar to the code fragment in Fig. 4.

References

- [1] A. A. Dobrynin, R. Entringer, and I. Gutman, Wiener Index of Trees: Theory and Applications *Acta Appl. Math.*, 66, 211-249, 2001.

- [2] G. Brassard, and P. Bratley, *Fundamentals of Algorithmics*, Prentice Hall, 1995.
- [3] T. H. Cormen, C. E. Leiserson, R. L. Rivest, and C. Stein, *Introduction to Algorithms*, MIT press, Cambridge, 2001.
- [4] P. Dankelmann, Computing the average distance of an interval graph, *Inform. Process. Lett.*, 48, 311-314, 1993.
- [5] D. E. Knuth, *The Art of Computer Programming. vol. 1*, 3/e, Addison-Wesley, 1997.
- [6] S. Klavžar, and I. Gutman, Wiener number of vertex-weighted graphs and a chemical applications, *Discrete Appl. Math.*, 80, 73-81, 1997
- [7] S. G. Wagner, The Fibonacci Number of Fibonacci Trees and a Related Family of Polynomial Recurrence Systems, *The Fibo. Quart.*, 45, 247-253, 2007.
- [8] S. G. Wagner, H. Wang, and G. Yu, Molecular Graphs and the Inverse Wiener Index Problem, *Discrete Appl. Math.*, 157, 1544-1554, 2009.